



905 Harrison Street · Allentown, PA 18103 · (610) 770-1044 · Fax (610) 770-8912 · www.LuminaireTesting.com

LTL NUMBER: 07858

DATE: 12-17-2003

PREPARED FOR: SIM-KAR LIGHTING

CATALOG NUMBER: ADJUST-432-A

LUMINAIRE: FORMED STEEL HOUSING WITH CAST ALUMINUM ENDS, FORMED SPECULAR ALUMINUM REFLECTORS WITH 42, 1/2" X 5" SLOTS ABOVE LAMPS, NO ENCLOSURE. LAMPS IN HIGH POSITION.

LAMPS: SIX 32 WATT T8 LINEAR FLUORESCENT LAMPS RATED AT 2850 LUMENS EACH.

LAMP CATALOG NUMBER: PHILIPS F32T8/TL841

BALLAST: ONE MAGNETEK B232I120RH AND ONE ADVANCE REL-4P32-RH-TP

LER: 81.9 BASED ON A MEASURED BALLAST FACTOR OF 84.9%

NOTE: THIS TEST WAS PRORATED FROM LTL TEST NUMBER 07828 TO SIMULATE A FOUR LAMP T8 LINEAR FLUORESCENT LUMINAIRE.

MOUNTING: PENDENT

LUMEN TO CANDELA RATIO USED = 9.18

TOTAL AS TESTED INPUT WATTS =167.1 AT 120.0 VOLTS

TOTAL PRORATED INPUT WATTS = 111.4 AT 120.0 VOLTS

THE 0 DEGREE PLANE IS PARALLEL WITH THE LAMPS.



#07858

CANDELA DISTRIBUTION

Table with 6 columns of candela values for various angles from 0 to 180 degrees.

FLUX

Table with 2 columns: angle and flux value.

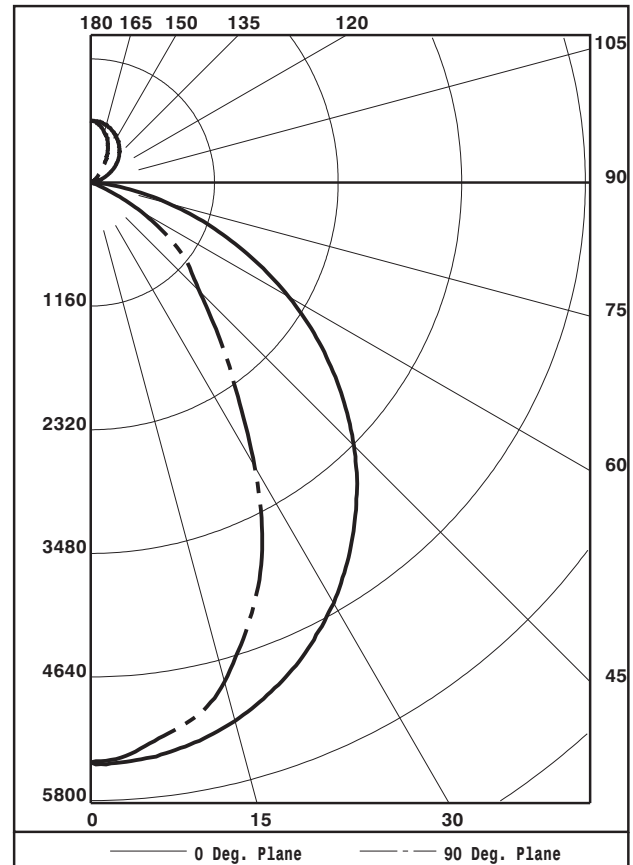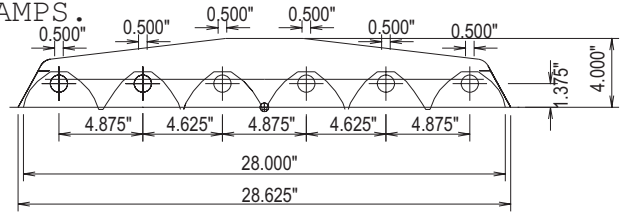

ZONAL LUMEN SUMMARY

Table with 5 columns: zone, lumens, %LAMP, and %FIXT.

TOTAL LUMINAIRE EFFICIENCY: 94.3%

CIE TYPE: DIRECT

PLANE: 0-DEG 90-DEG

SPACING CRITERIA: 1.2 1.0

TESTED BY HERSCHEL SCHRECK
CHECKED BY MIKE GRATHER



LUMINAIRE TESTING LABORATORY, INC.



905 Harrison Street · Allentown, PA 18103 · (610) 770-1044 · Fax (610) 770-8912 · www.LuminaireTesting.com

LTL NUMBER: 07858

DATE: 12-17-2003

PREPARED FOR: SIM-KAR LIGHTING

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD
EFFECTIVE FLOOR CAVITY REFLECTANCE 0.20

Table with 11 columns (RC, RW, 80, 70, 50, 30, 10, 0) and 11 rows (0-10) showing utilization coefficients.

PLANE: 0-DEG 90-DEG
LUMINOUS LENGTH: 48.125 28.625

LUMINANCE IN CANDELA PER SQUARE METER

Table with 4 columns (ANGLE IN DEG, AVERAGE 0-DEG, AVERAGE 45-DEG, AVERAGE 90-DEG) and 6 rows (0, 45, 55, 65, 75, 85) showing average luminance values.



LTL NUMBER: 07858
PREPARED FOR: SIM-KAR LIGHTING

DATE: 12-17-2003

CANDELA DISTRIBUTION

Table with 6 columns of candela values for various angles from 0.0 to 180 degrees.

ZONAL LUMEN SUMMARY

Table with 2 columns showing lumen values for various angular zones from 0-5 to 175-180 degrees.

THIS TEST WAS CONDUCTED USING RELATIVE PHOTOMETRY TECHNIQUES ACCORDING TO STANDARD IESNA PROCEDURES. THE USER MUST THEREFORE USE CAUTION IN THE FOLLOWING SITUATIONS: 1) THIS TEST WAS PERFORMED USING A SPECIFIC BALLAST/LAMP COMBINATION. EXTRAPOLATION OF THESE DATA FOR OTHER BALLAST/LAMP COMBINATIONS MAY PRODUCE ERRONEOUS RESULTS. 2) ACCORDING TO IESNA PROCEDURES, THE BALLAST(S) AND LAMP(S) ARE PRESUMED TO PRODUCE 100% OF RATED OUTPUT. AN APPROPRIATE BALLAST FACTOR MUST BE APPLIED TO THE LUMEN OUTPUT RATINGS AND LUMINOUS INTENSITY VALUES GIVEN. 3) THIS TEST WAS CONDUCTED IN A CONTROLLED LABORATORY ENVIRONMENT WHERE THE AMBIENT TEMPERATURE WAS HELD AT 25 C ± 1 C. FIELD PERFORMANCE MAY DIFFER PARTICULARLY IN REGARDS TO CHANGE IN LUMINOUS OUTPUT AS A RESULT OF DIFFERENCE IN AMBIENT TEMPERATURE AND METHOD OF MOUNTING THE LUMINAIRE.