



LTL NUMBER: 07867

DATE: 12-22-2003

PREPARED FOR: SIM-KAR LIGHTING

CATALOG NUMBER: ADJUST-654-A

LUMINAIRE: FORMED STEEL HOUSING WITH CAST ALUMINUM ENDS, FORMED SPECULAR ALUMINUM REFLECTORS WITH 42, 1/2" X 5" SLOTS ABOVE LAMPS, NO ENCLOSURE. LAMPS IN LOW POSITION.

LAMPS: SIX 54 WATT HIGH OUTPUT T5 LINEAR FLUORESCENT LAMPS RATED AT 4400 LUMENS EACH.

LAMP CATALOG NUMBER: SYLVANIA FP54/841/HO

BALLAST: ONE MAGNETEK B254PUNV-D AND TWO ADVANCE ICN-2S54

LER: 83.3 BASED ON A MEASURED BALLAST FACTOR OF 123.9%

MOUNTING: PENDENT

LUMEN TO CANDELA RATIO USED = 9.18

TOTAL INPUT WATTS =369.2 AT 120.0 VOLTS



THE 0 DEGREE PLANE IS PARALLEL WITH THE LAMPS.

CANDELA DISTRIBUTION

Table with 6 columns representing beam angles (0, 5, 15, 25, 35, 45, 55, 65, 75, 85, 90, 95, 105, 115, 125, 135, 145, 155, 165, 175, 180) and 6 rows representing candela values.

FLUX

Table with 6 columns representing beam angles (0, 5, 15, 25, 35, 45, 55, 65, 75, 85, 90, 95, 105, 115, 125, 135, 145, 155, 165, 175, 180) and 6 rows representing flux values.

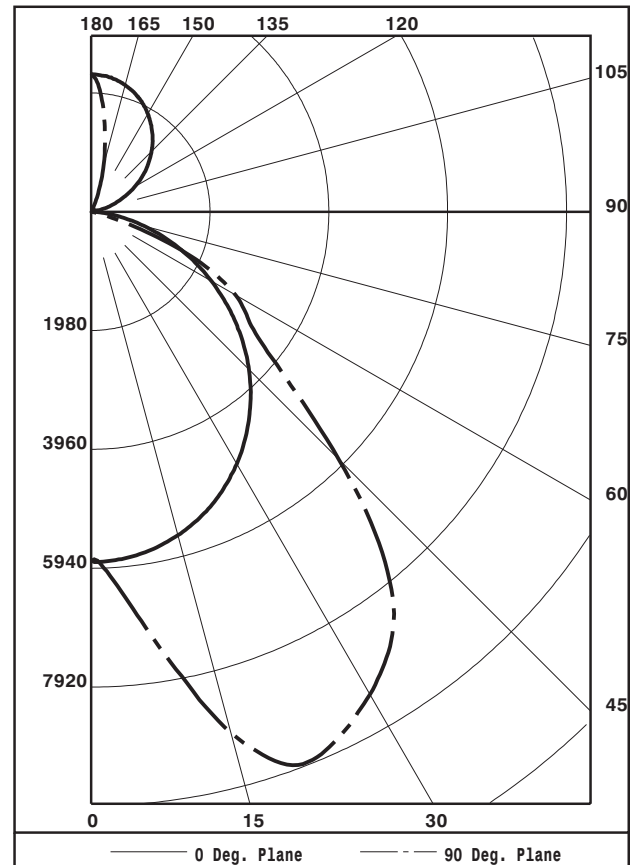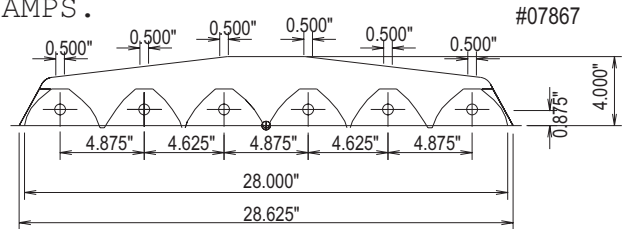

ZONAL LUMEN SUMMARY

Table with 4 columns: ZONE, LUMENS, %LAMP, and %FIXT. Rows represent beam angle zones from 0-30 to 0-180 degrees.

TOTAL LUMINAIRE EFFICIENCY: 94.0%

CIE TYPE: DIRECT

PLANE: 0-DEG 90-DEG

SPACING CRITERIA: 1.2 1.8

TESTED BY HERSCHEL SCHRECK
CHECKED BY MIKE GRATHER



LUMINAIRE TESTING LABORATORY, INC.



905 Harrison Street · Allentown, PA 18103 · (610) 770-1044 · Fax (610) 770-8912 · www.LuminaireTesting.com

LTL NUMBER: 07867

DATE: 12-22-2003

PREPARED FOR: SIM-KAR LIGHTING

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD
EFFECTIVE FLOOR CAVITY REFLECTANCE 0.20

Table with columns RC, RW, and rows for angles 80, 70, 50, 30, 10, 0. Each cell contains a 4-digit number representing utilization coefficients.

PLANE: 0-DEG 90-DEG
LUMINOUS LENGTH: 48.125 28.625

Table showing LUMINANCE IN CANDELA PER SQUARE METER for angles 0, 45, 55, 65, 75, 85 degrees, with columns for average values at 0-DEG, 45-DEG, and 90-DEG.



LTL NUMBER: 07867
PREPARED FOR: SIM-KAR LIGHTING

DATE: 12-22-2003

CANDELA DISTRIBUTION

Table with 6 columns of candela values for various angles from 0 to 180 degrees.

ZONAL LUMEN SUMMARY

Table with 2 columns: Zonal angle ranges and corresponding lumen values.

THIS TEST WAS CONDUCTED USING RELATIVE PHOTOMETRY TECHNIQUES ACCORDING TO STANDARD IESNA PROCEDURES. THE USER MUST THEREFORE USE CAUTION IN THE FOLLOWING SITUATIONS: 1) THIS TEST WAS PERFORMED USING A SPECIFIC BALLAST/LAMP COMBINATION. EXTRAPOLATION OF THESE DATA FOR OTHER BALLAST/LAMP COMBINATIONS MAY PRODUCE ERRONEOUS RESULTS. 2) ACCORDING TO IESNA PROCEDURES, THE BALLAST(S) AND LAMP(S) ARE PRESUMED TO PRODUCE 100% OF RATED OUTPUT. AN APPROPRIATE BALLAST FACTOR MUST BE APPLIED TO THE LUMEN OUTPUT RATINGS AND LUMINOUS INTENSITY VALUES GIVEN. 3) THIS TEST WAS CONDUCTED IN A CONTROLLED LABORATORY ENVIRONMENT WHERE THE AMBIENT TEMPERATURE WAS HELD AT 25 C ± 1 C. FIELD PERFORMANCE MAY DIFFER PARTICULARLY IN REGARDS TO CHANGE IN LUMINOUS OUTPUT AS A RESULT OF DIFFERENCE IN AMBIENT TEMPERATURE AND METHOD OF MOUNTING THE LUMINAIRE.