

Wraparounds

Available with a glare-reducing diffuser, Wraparounds can be individually or continuous-row mounted. Non-yellowing acrylic prismatic lens keeps the light bright.



SY 920 440/WRW 440



WRCO 440




SY 920 220/WRW 220

Wraparounds

- Shallow 3-1/4" depth is ideal for low ceilings.
- V-shaped acrylic diffuser distributes light evenly and reduces glare.
- Lift and shift lens hinges from either side for easy, tool-free cleaning and relamping.
- Solid oak ends (WRCO) add a decorative touch.
- Die-formed, heavy gauge, steel housing.
- Flush, ceiling mount – stem, individual or continuous row.
- U.L. listed.

See the Commercial Fixture's Buyers Guide for our complete commercial product line.

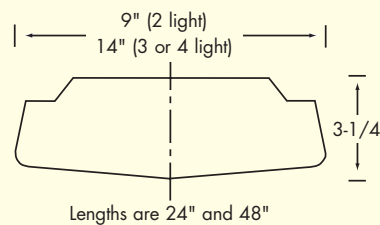

ORDERING INFORMATION

Example: WRW240ESB120V

SERIES	LAMPS	BALLAST	VOLTAGE
SY920 - White ends, commercial	220 - (2) 20W 24" T12 232 - (2) 32W 48" T8	B11 - Electronic T8 E1 - Energy Saving	120V 277V
WRW - White ends, residential	240 - (2) 34/40W 48" T12 332 - (3) 32W 48" T8*	Magnetic T12 ESB - Residential	UNV-120-277V
WRCO - Country Oak ends	420 - (4) 20W 24" T12 432 - (4) 32W 48" T8 440 - (4) 34/40W 48" T12	Magnetic T12 RES - Magnetic T12 LPF	

*332- (3) 32W T8 lamp unit is available in the SY920 series only.

