


# SLED LED EXIT LIGHT

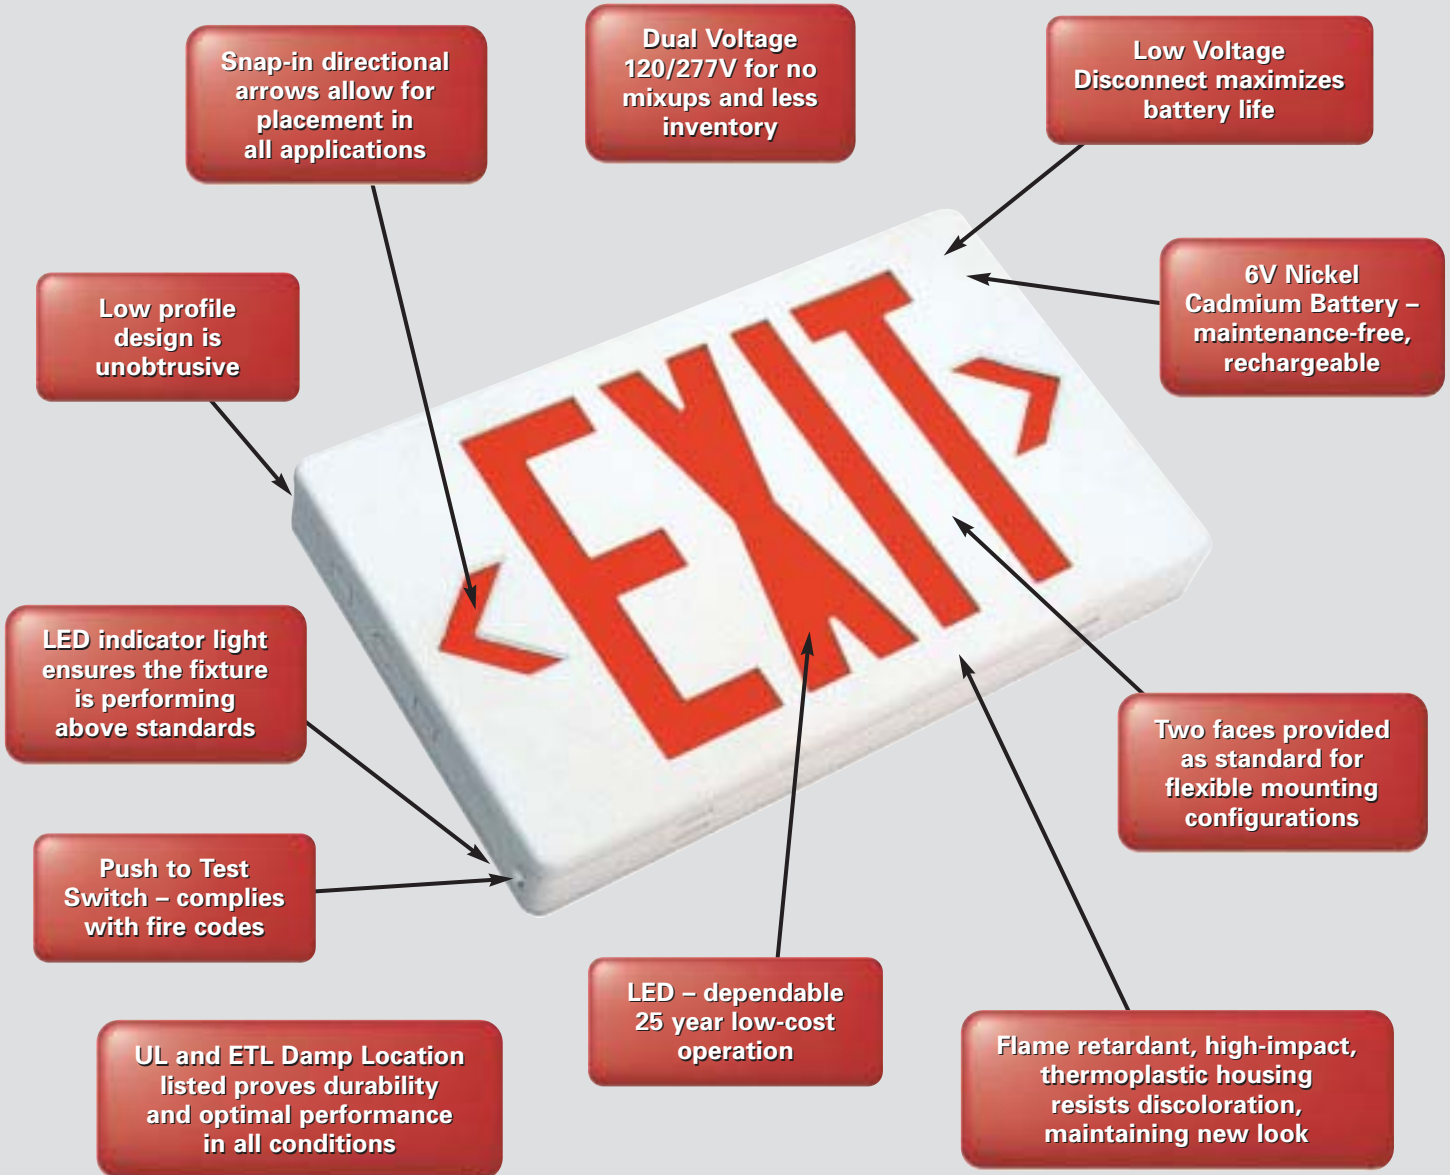


**SIMKAR's Easy Installation** feature allows for quick and easy mounting.

1. Simply pull supply wires in junction box through the canopy or backplate knockout.
2. Secure the canopy or backplate to the junction box. Wire fixture with both hands free!
3. Snap the entire fixture right on to the canopy.

**It's that easy ... It's a snap!**

← Canopy Mount

Back Plate Mount →

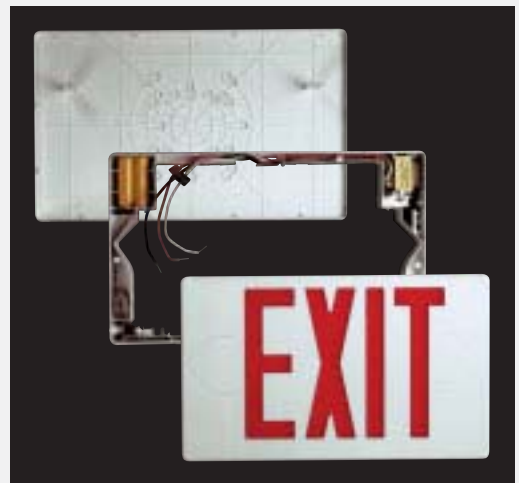

# SLED LED EXIT LIGHT

**5 YEAR WARRANTY**



**SIMKAR's SLED** combines a modern, low profile design with LED energy saving technology and SIMKAR's Easy Connect back plate to make this an exceptional value.


**Housing:** Injection-molded, V-O flame retardant, high-impact, thermoplastic housing. Compact, low profile design in a white or black housing. Exit light provided with two faces and back plate as standard.

**Illumination:** Energy efficient red or green LED. LED lamp life of 25 years plus. Energy consumption less than 4 watts for red letters and less than 2 watts for green letters. Snap-in directional arrows.

**Battery:** Nickel-cadmium battery, maintenance-free, rechargeable.

**Electrical:** 120 or 277V AC operation. Charge rate/power on LED indicator light. Periodic testing for three minutes, every thirty days is recommended to comply with fire codes. LVD (low voltage disconnect) feature activates to prevent battery from deep discharge, but not before the minimum 90-minute emergency operation. Standard AC operation (option A), emergency battery backup units available (option B). UL and ETL Damp location listed.

**Mounting:** Universal mounting canopy for side or top installation. Easy connect back plate snaps into place. Back plate and mounting canopy fit most standard junction boxes. Hardware included.

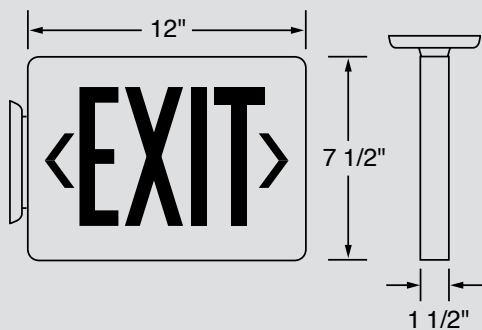

## Ordering Information

### SLED

SERIES

SLED - SIMKAR LED Exit Light

### B

OPTION

A - AC  
B - Battery Backup

### R

LETTERING

G - Green  
R - Red

### W

HOUSING

B - Black  
W - White