


SEL EDGE LIT LED EXIT LIGHT

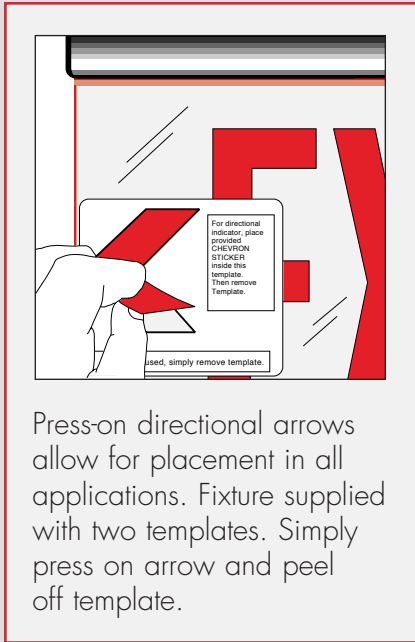

Aluminum housing stands up in all situations

Dual Voltage 120/277V for no mixups and less inventory

LED indicator light ensures the fixture is performing above standards

Low Voltage Disconnect maximizes battery life

6V Battery – maintenance-free, rechargeable

Push to Test Switch – complies with fire codes

Compact, low profile design is ideal for commercial and retail applications

ETL listed proves durability and optimal performance in all conditions

Beveled lettering for clear, crisp, upscale look

LED – dependable 25 year low-cost operation



SEL EDGE LIT LED EXIT LIGHT

5 YEAR WARRANTY



SIMKAR's SEL is a true breakthrough! Easy-to apply and easy to remove luminescent directional arrows make sure you always have the correct Edge Lit LED Exit light in stock.


Housing: Aluminum housing, natural finish. Clear acrylic panel with beveled lettering for maximum light reflectance. Compact, low profile design. To order a second face for a single faced unit, order 2R for red and 2G for green lettering.

Illumination: Energy efficient red or green LED. LED lamp life of 25 years plus. Energy consumption of less than 3 watts for AC only and less than 5 watts for battery backup. Press-on directional arrows allow for placement in all applications. Fixture supplied with two templates. Simply press on arrow and peel off template.

Battery: 6-volt, sealed lead acid, maintenance-free, rechargeable.

Electrical: 120/277V AC operation. AC on indicator light and test switch. Periodic testing for three minutes, every thirty days is recommended to comply with local fire codes. LVD (low voltage disconnect) feature activates to prevent battery from deep discharge, but not before the minimum 90-minute emergency operation. Standard AC operation (option A), emergency battery backup units available (option B). ETL listed.

Mounting: Tri-mount canopy for side, ceiling or flush installation. Hardware included.

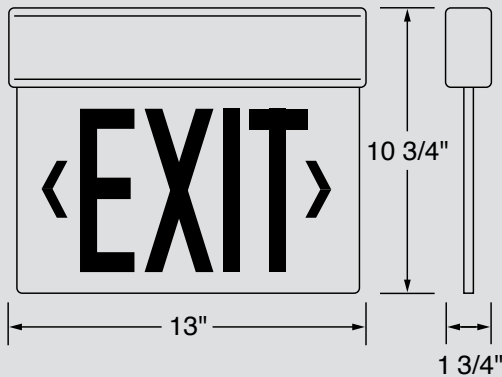

Ordering Information

SEL

SERIES

SEL - SIMKAR Edge Lit LED Exit Light

B

OPTION

A - AC
B - Battery Backup

1

FACES

1 - Single
2 - Double

R

LETTERING

G - Green
R - Red

A

HOUSING

A - Aluminum

NOTE: To order a second face for a single faced unit, order 2R for red and 2G for green lettering.