

Self Luminous Exit Light SSL

CATALOG NUMBER	TYPE



Housing: Injection-molded, V-O flame retardant, high-impact, thermoplastic housing. Housing is completely sealed, vandal-resistant, explosion-proof, and resistant to corrosion and vapors. Compact, low profile design with rounded corners available in die-cast brushed aluminum or powder coated black or white. Exit light provided with one color face plate as standard. Available colors include green, red, black or white. ADA Compliant.

Illumination: Self-luminous with letter-shaped light tubes. Tubes manufactured from borosilicate (hard) glass, internally coated with zinc sulfide phosphor and filled with tritium gas. No electrical energy source required. Light tubes have lives of either 10 or 20 years. Cover-up chevrons for placement in all applications, even for floor proximity.

Electrical: ETL listed. Meets UL924 and NFPA 101 Life Safety Code.

Mounting: Concealed mounting for back or side installation. Suitable for floor proximity mounting.


Critical Applications: Simkar strives to offer the most current product designs and value. Consequently, all Simkar products are subject to redesign and revision. Critical applications such as size, operating temperature, or sensor operation should be confirmed with the factory.

Warranty: Ten or twenty year warranty on illumination and housing (depending upon model).


FEATURES AND BENEFITS

- | | | |
|------------------------------------|---|--|
| Easy mount canopy | ➤ | Simple installation, no wiring |
| Low profile housing | ➤ | Stylish and unobtrusive, yet virtually indestructible |
| | ➤ | ADA Compliant |
| ETL listed | ➤ | Durable and long lasting performance |
| Letter shaped light tubes | ➤ | Dependable 10 or 20 year operation |
| Cover-up directional arrows | ➤ | Allows for placement in all applications, even for floor proximity |
| No electrical wiring or batteries | ➤ | Maintenance-free |
| Requires no external energy source | ➤ | No operating costs |

DRAWINGS AND DIMENSIONS



Cover-up directional arrows allow for placement in all applications – even floor proximity

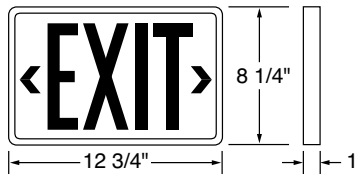

Variety of face color and frame options available

ORDERING INFORMATION

Example: SSL201RW

SSL

SERIES

SSL - SIMKAR Self-Luminous Exit Light

LIFE

10 - 10 Years
20 - 20 Years

FACES

1 - Single
2 - Double

FACE

G - Green
R - Red
B - Black
W - White

HOUSING

A - Brushed aluminum
B - Black
W - White