


PR Series The Producer



Dimensions	Fixture Length	Fixture Width	Fixture Depth
PR Series	13.5"	9.25"	6.5"
PR Series	12.75"	16"	16" DIA.

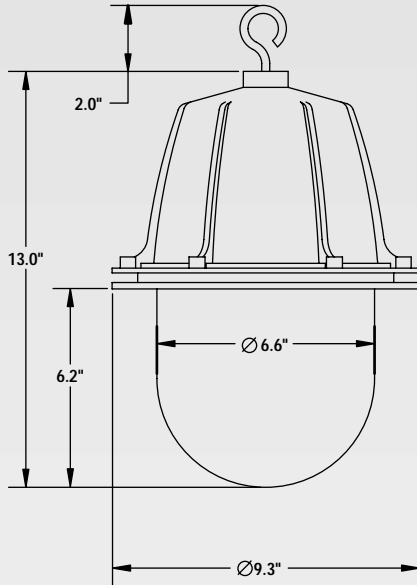


40°C Ambient Rated



LISTED FOR WET LOCATIONS (PENDING)
CONSULT FACTORY FOR CUL AVAILABILITY

Typical Poultry House
PR Series

Mounting Height: 15'
Spacing: 20'
Average 7 footcandles
100W High Pressure Sodium

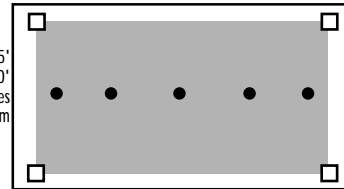

Mounting Height: 15'
Spacing: 20'
Average 10 footcandles
150W High Pressure Sodium

Available in 120V, the Producer is a versatile yet durable fixture designed for difficult and harsh environments such as poultry houses and wash down heavy duty applications.

Housing

The cast aluminum housing is electrostatically powder coated to withstand extreme environments associated with poultry houses.

Mounting

A stainless steel hook is standard for hanging the fixture from the structure.

Gasket

The Producer has watertight neoprene gaskets for use in wet locations and carries our 2 year warranty.

Optics

A heavy duty prismatic borasilica bell glass is mounted to the housing using a cast aluminum ring with stainless steel hardware.

Lamps

All Producer fixtures come with standard HPS lamps warranted for 1 year.

Ballast

The Spartan normal power factor ballast is warranted for 2 years.

Wiring

All units are supplied with 6' SOW 16/3 cord, a 120V plug is optional.

Warranty

The PR Series sold by C.E.W. Lighting, Inc., unless otherwise specified, will be warranted to be free of defects in materials and workmanship under normal use and service for a period of up to two (2) years from date of shipment. If found to be defective by us, we will replace the non-performing parts or goods.



To build catalog numbers refer to inside front cover

PR Series Order Information

Housing Size	Wattage Lamp	Catalog Number		
		Hook & Cord	Hook, Cord & Plug	Voltage
9"	70W	PR1507-1	PR2507-1(b)	120V
	100W	PR1510-1	PR2510-1(b)	120V
	150W	PR1515-1	PR2515-1(b)	120V

(b)Options: Indicate options in space (b) (Factory Installed)

SUFFIX

Description	(b)
Straight Blade Plug (120V)	SB
Twist Lock Plug (120V NEMA L5-15P)	TL

**PR Series
The Producer**

Wattage Range:
70-150W



Lamp Included

Number of Fixtures Per Circuit (Maximum)

Lamp Type	Voltage	Power Factor	BASED ON			
			Operating Amps		Nominal Amps	
			Fixtures 20 (A)	Circuit 30 (A)	Fixture Oper. Amps	Amps Start. Amps
LU70	120	NPF	9	14	1.7	3.2
	120	HPF	20	30	0.8	2.1
LU100	120	NPF	6	10	2.3	4.8
	120	HPF	13	20	1.2	2.5
LU150	120	NPF	4	6	3.5	4.8
	120	HPF	9	14	1.7	4.1