
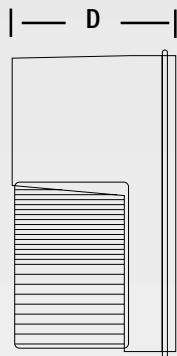


# WSS Series 11" Wall Pack

Dimensions	Fixture Length	Fixture Width	Fixture Depth	Approx. Ship Wt.
WPD Series	11"	6.9"	5.25"	5 LBS.

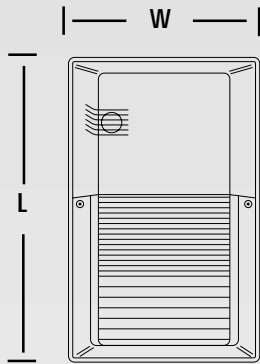

Designed for both residential and commercial applications for mounting heights of 12' and below, the WSS wall pack is both an economical and cost effective luminaire to own and operate.

### Access

Access to all internal components requires the removal of only two screws. Tamperproof screws are available.

### Ballast/Lamp

The WSS Series fixture is available in 35-70W high pressure sodium utilizing a 120V NPF ballast, medium based HPS lamp and twin tube fluorescent design in 13W. 18 - 42W 4-pin lamp with 120 or 277V electronic ballast.

### Housing/Reflector

The compact WSS luminaire is weatherproof and rated for outdoor use. It has a cast aluminum base plate and a polycarbonate injection molded reflector. Housing is available in either bronze or white.

### Mountings

Dual mounting options are available: 4" recessed outlet box & 1/2" conduit (bottom entry). Optional internal photocell is available. The recommended mounting height is 12' and lower.

### Labels

The WSS fixture is UL listed for wet locations.

### Warranty

The WSS Wall Pack sold by C.E.W. Lighting, Inc., unless otherwise specified, will be warranted to be free of defects in materials and workmanship under normal use and service for a period of two (2) years from date of shipment. If found to be defective by us, we will replace the non-performing components.




13W & 2-13W 32°F Temp Rated  
18-42W Quad -20°F Temp Rated



LISTED FOR WET LOCATIONS  
CONSULT FACTORY FOR CUL AVAILABILITY

I.E.S. photometrics available by e-mail or on disk

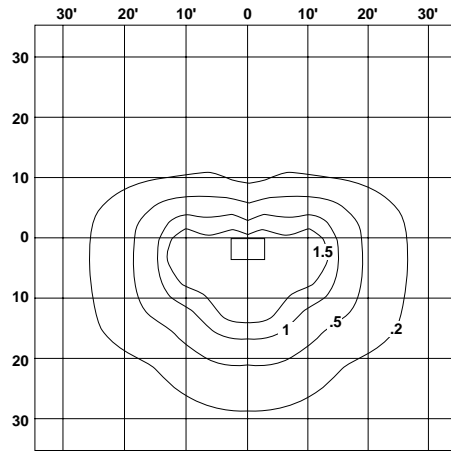

70W HPS Wall Pack at 10' mounting height.

### HPS-70 Watt/Clear

Mounting Height: 10'

Number of Fixtures: 2

Lamp Lumens: 6,300

The WSS Series photometric data is based on a 70 watt clear HPS lamp rated at 6,300 lamp lumens. Footcandle values for other wattages are obtained by multiplying the chart values by the following factors:

Lamp/Wattage	Factor
70W HPS	1
50W HPS	.64
35W HPS	.36



# WSS Series 11" Wall Pack

Wattage Range:  
HPS 35-70W  
CFL 13-42W

To build catalog numbers refer to inside front cover

WSS Wall Pack Order Information		
Mounting Position	Wattage Lamp	Catalog Number
Wall	35W HPS	WSS0503-1(b)
	50W HPS	WSS0505-1(b)
	70W HPS	WSS0507-1(b)
	13W CFL	WSS0313-1(b)
	18W CFL	WSS0318-(a)(b)
	26W CFL	WSS0326-(a)(b)
	32W CFL	WSS0332-(a)(b)
	42W CFL	WSS0342-(a)(b)
	2-13W	WSS0323-1(b)

(a) Voltage 1= 120V (NPF only)

Change Suffix (a) to:	
120 Volt	277 Volt
1	2

(b) Options: Indicate options in space (b) (Factory Installed)

Description	SUFFIX (b)
White Housing	WT
Button Photocell	B

Accessories: (Field Installed)

Tamperproof Screws	WSS-TS
Tamperproof Screwdriver & Screws	WSS-TSD



Lamp Included